




Intermec

## Product Profile

- Backlit display, full keypad and multiple scanning options
- Ergonomic design
- Upgradable to RF to protect your investment
- Industry standard tools and program generator
- Long life battery and convenient communications accessories

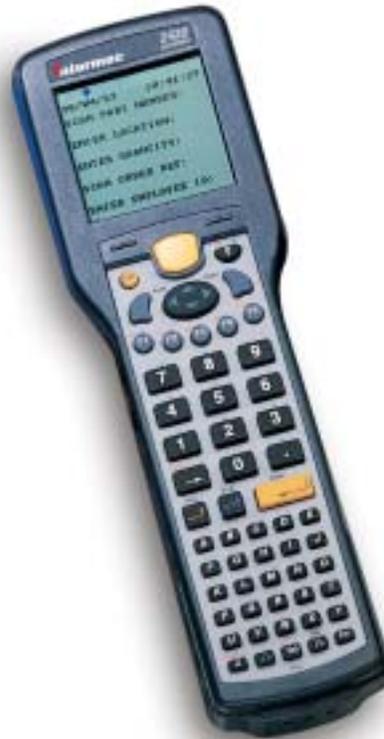

### 2 4 2 0 H A N D H E L D C O M P U T E R

The 2420 is a full-featured terminal suited to inventory control, asset management, item tracking, maintenance management and other off-line data collection applications. Built to last, it will survive the repeated drops and rough environmental conditions found in manufacturing, distribution, health care and other demanding uses.

Applications can be developed using industry standard language tools; no proprietary languages to learn and support. The task is even quicker with EZBuilder™, a rapid application development and prototyping tool that requires no programming language expertise at all. Fast data communications to a PC or host are supported either through a portable serial adapter or a desktop communications dock.

With its Lithium Ion main batteries - normally found in more expensive computers and laptop PCs—data can be

collected for a normal shift or longer without a battery change. Recharge them gradually while the terminal is in the communications dock or quickly in a convenient multi-pack charger. Data will be saved for days in the event the main battery is temporarily or accidentally removed. An internal modem option provides remote dial-up access at speeds up to 33.6 Kbps.

Standard memory and non-volatile storage will satisfy most application requirements. For larger files or portable data bases, add 2 or 4MB memory expansion options. Easily transform the 2420 to a wireless terminal. Integrated scanners are replaceable modules for easier maintenance.

And the 2420 is a part of Intermec's 2400 family of fully compatible hand-held, vehicle mount and stationary shop floor terminals.



Intermec

**Physical Characteristics****Length:** 26.9 cm (10.6")**Width:** 8.2 cm (3.2") at scanner,  
6.4 cm (2.5") at grip**Height:** 7.1 cm (2.8") at scanner,  
5.7 cm (2.3") at grip**Weight:** 620 g (22 oz.) including battery**Environment****Operating:** -20° to 50°C (-4°F to 122°F)**Storage:** -20° to 60°C (-4°F to 140°F)  
for less than two weeks**Humidity:** Non-condensing (0 to 95% RH)**Shock and vibration protection:**

Warrented for 5-foot drop to concrete

**Power****Operating:** Lithium Ion battery pack**Memory Backup:** Rechargeable NiCad**Memory****RAM Memory:** 1MB**Non-volatile Memory:** 2MB


Additional 2MB (4MB total) optional

**Extended Memory:** 2MB or 4MB SRAM  
(not available with modem option)**Interfaces**

- Optical (sealed) serial interface
- RS232-C up to 38.4 baud
- XMODEM, YMODEM for data transfer
- Supports Configurable Serial Protocol and XON/XOFF

**Display**

- CGA compatible backlit LCD displaying 16 lines of 20 characters per line (128 x 160 dot matrix) plus graphic status icons

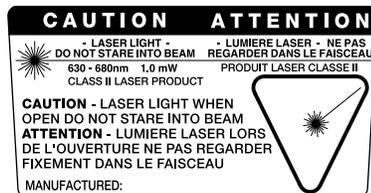**North America**

Corporate Headquarters  
6001 36<sup>th</sup> Avenue West  
Everett, Washington 98203  
tel: 425.348.2600  
fax: 425.355.9551

**Systems & Solutions**

550 2<sup>nd</sup> Street S.E.  
Cedar Rapids, Iowa 52401  
tel: 319.369.3100  
fax: 319.369.3453

**Media Supplies**

9290 Le Saint Drive  
Fairfield, Ohio 45014  
tel: 513.874.5882  
fax: 513.874.8487

**Europe/  
Middle East & Africa**

Headquarters  
Sovereign House  
Vastern Road  
Reading, Berkshire RG1 8BT  
United Kingdom  
tel: +44.118.987.9400  
fax: +44.118.987.9401

**Keyboard**

Elastomeric 56-key with full alphanumeric set, function keys and oversized numeric

**Bar Code Symbolologies**

Code 39, 2 of 5, Interleaved 2 of 5, Codabar, UPC/EAN Code 128, Code 11, Code 93, Plessey, MSI, PDF-417

**Bar Code Scanning Options**Integrated visible laser diode scanner  
USA/Canada Class II, International Class 2  
**Depth of Field\*-Standard Range (670nm)**

5 mil	9.4-15.7cm	3.7-6.2"
10 mil	7.4-35.3cm	2.9-13.9"
20 mil	10.2-63.5cm	4-25"
30 mil	10.2-86.4cm	4-34"
40 mil	12.7-99cm	5-39"
55 mil	19.1-126cm	7.5-49"
55 mil retroreflective	105-151cm	41-59"
100 mil retroreflective	113-227cm	44-89"

\* measured for Code 39

**Depth of Field-Long Range (650nm)**

5 mil	29.5-49.8cm	11.6-19.6"
10 mil	21.8-85.3cm	8.6-33.6"
20 mil	21.8-98cm	8.6-38.6"
30 mil	24.4-192cm	9.6-75.6"
40 mil	24.4-204.7cm	9.6-80.6"
70 mil retroreflective	192-410.5cm	76.6-161.6"
100 mil retroreflective	212.3-532.4cm	83.6-209.6"

- High density PDF 417 and High Visibility option available
- Optional adapter module with 10-pin connector for use with Intermec cabled scanners and wands

**Integrated Modem Option**

- 33.6 Kbps transfer rate RJ11 connector and cable (6ft/2m)
- Operating: 0-50°C, 32-104°F
- Regulatory: UL Listed & C22.2 No.950 FCC Parts 15 & 68. Canada ICES-003 & CS03.
- SRAM expansion and RF upgradability not available with modem option.

**Asia**

Hong Kong  
2602 Convention Plaza  
Office Tower  
1 Harbor Road  
Wanchai, Hong Kong  
tel: 852.2574.9777  
fax: 852.2574.9725

**Singapore**

25-16 International Plaza  
10 Anson Road, 079903  
tel: 65.324.8391  
fax: 65.324.8393

**Australia**

Level 7, 200 Pacific Highway  
Crows Nest NSW 2065  
Australia  
tel: 61.2.9492.4400  
fax: 61.2.9954.6300

**South America & Mexico**

Latin America Headquarters  
17921 B Skypark Circle  
Irvine, California 92614  
tel: 949.442.9393  
fax: 949.757.1687

**Mexico**

Tamulipas 141, Primero Piso  
06140 Mexico, D.F.  
tel: 525.55.211.1919  
fax: 525.55.211.8121

**RF Upgradable**

Can be retrofitted with integrated RF module

**Frequency:** 2.4 GHz frequency band, actual frequencies in use vary by country  
WLI Forum OpenAir**Type:** Frequency Hopping Spread Spectrum**Data Rate:** 1.6 Mbps, .8 Mbps fallback**Range\*:** From 1500+ ft (450+ m) to 500 ft (150 m) depending on environment**IEEE 802.11b Wi-Fi Certified****Type:** Direct Sequence Spread Spectrum**Data Rate:** 11/5.5/2/1 Mbps with Auto fallback for increased range**Range\* at 1 Mbps:** From 1750 ft (533 m) to 165 ft (50 m) depending on environment**Range\* at 11 Mbps:** From 525 ft (160 m) to 80 ft (24 m) depending on environment**Security:** Wired Equivalent Privacy (WEP) - 64 or 126 bit encryption

\* Unlimited range with roaming

**Accessories**

Handstrap, holster, belt clip, pistol grip handle, vehicle mount holder, battery charger, battery pack, serial adapter and communications dock, User Manual, Programmer's Software Kit (PSK), EZBuilder™ Rapid Application Development software

**Regulatory Approvals**

UL Listed, UL 1950 and C22.2 No. 950, TÜV Rheinland GS, EN 60950 and EN 60825-1, FCC Part 15, Canada, RSS210 and ICES-003, Class B, EN 55022 / CISPR 22, Class B, ETS 300 328, ETS 300 339, Compliant with all European Directives, CE marked

Intermec reserves the right to make changes without notice to any products herein for any reason at any time, including but not limited to improving the reliability, form, fit, function or design. Please contact Intermec for current price list and availability.

**Worldwide**

**Fax Document Retrieval Service**  
800.755.5505  
(North America Only)  
tel: 650.556.8447

**Internet**

www.intermec.com

**Sales**

800.347.2636  
(toll free in N.A.)  
tel: 425.348.2726

**Service and Support**

800.755.5505  
(toll free in N.A.)  
tel: 425.356.1799

Copyright © 2002 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 608427-01C 04/02

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.