



Intermec

Product Profile

- Windows CE Open systems design
- Remote Web based management and support tools
- Ergonomic design includes large, 1/4 VGA graphics display
- Intelligent data routing reduces end-user training and user errors
- Hardware and Software expandability provides investment protection



5 0 2 0 H A N D H E L D C O M P U T E R

The Intermec 5020 Data Collection PC is part of an open systems Enterprise Data Collection solution that makes operations more efficient.


Based on the Microsoft Windows CE operating system, the 5020 supports the most commonly used tools and protocols making the device quicker and easier to implement, resulting in faster return on investment. The 5020 supports programming environments such as Visual Basic, Visual C++, HTML and JScript. It also supports standard TCP/IP so that it can easily be linked directly into a corporate Intranet. To make management of the 5020 quicker, easier, and significantly less expensive, it supports standard SNMP. Each unit comes standard with remote configuration and management capabilities that can be accessed over the Internet from a desktop PC web browser.

The 5020 combines Windows CE with wireless networking, graphics and a value-added intelligent data server" that allows users to perform complex, even multiple task quickly, without the need for the user to navigate through different screens.

The 5020 maximizes software "up time" by utilizing the following features:

- Remote file management: to allow software on portable devices to be maintained from a remote PC with a web browser.
- Windows security: to prevent user tampering
- Versioning: to prevent software upgrades and enhancements from introducing system incompatibilities

Available PC-Card and Compact Flash card slots ensure that the device can take advantage of the latest technologies used in data collection applications. PC-Card radio technology provides the option to upgrade to new radio technologies and protect the hardware investment. Compact Flash technology supports the addition or enhancement of the latest software technologies or applications and also provides temporary storage facility for the increasing amounts of data that can be made available with 2-D bar codes, RFID tags, and higher bandwidth wireless networks.

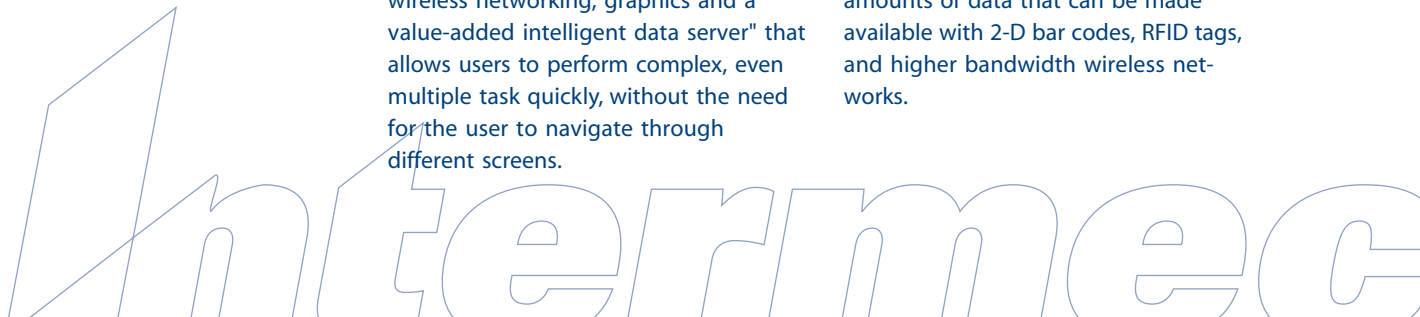

Intermec

Physical Characteristics

Width: 10.2 cm (4") at display; 7.0 cm. (2.75") at grip

Depth: 7.1 cm. (2.8") max; 4.572 cm (1.8") at grip

Length: 22.9 cm (9.0")

Weight: 672g (24 oz.)

Display

- 1/4 VGA monochrome
- 8.4 cm. (3.3") diagonal 5.1 cm x 6.73 cm. (2" x 2.65")
- Graphics capable

Keyboard

- Elastomeric 43-key shift alpha with full alphanumeric functions, full-sized numeric keys, and 10 dedicated function keys
- 56 key non-shift with full alphanumeric layout
- Languages supported include English, French, German, Italian, Portuguese, Spanish, Finnish, Swedish, Danish, and Norwegian

Environmental

Operating: -20° to 50°C (-4° to 122°F)

Storage: 0° to 60°C (32° to 140°F)

Humidity: Non-condensing (0 to 95% RH)

Shock and Vibration Protection: Withstands multiple 5-foot drops to concrete

Rain and Dust: Sealed to IP54

Meets Mil-Std 2880E

Bar Code Scanning Options

Integrated visible laser diode scanner

U.S./Canada Class II. International Class 2

Depth of Field—Standard Range (670nm)

5 mil	9.4 - 15.7 cm (3.7 - 8.2")
10 mil	7.4 - 35.3 cm (2.5 - 13.9")
20 mil	10.2 - 63.5 cm. (4 - 25")
30.0 mil	10.2 - 86.4 cm (4 - 34")
40.0 mil	12.7 - 99 cm. (5 - 39")
55.0 mil	19.1 - 126 cm (7.5 - 49")
55 mil retroflective	105 - 151 cm (41 - 59")
100 mil retroflective	113 - 227 cm (44 - 89")

Depth of Field—Long Range (650nm)

5 mil	29.5 - 49.8 cm (11.6 - 19.6")
10 mil	21.8 - 85.3 cm (8.5 - 33.6")
20 mil	21.8 - 98 cm (8.6 - 38.6")
30 mil	24.4 - 192 cm (9.6 - 75.6")
40 mil	24.4 - 204.7 cm (9.6 - 80.6")
70 mil retroflective	192 - 410.5 cm (76.8 - 161.6")
100 mil retroflective	212.3 - 532.4 cm (83.6 - 209.6")

Integrated Advanced Long Range Available

Optional 10-pin connector for use with Intermec cabled scanners and wands

Bar Codes Supported

Code 39, 2 of 5, Interleaved 2 of 5, Codabar, UPC/EAN Code 128, Code11, Code 93, Plessey, MSI, Code 16K, Code 49, PDF-417 supported using tethered scanner.

RF Options**OpenAir 2.4 GHz (Frequency Hopping Spread Spectrum)**

100 mW max output power

Data speed: 1.6 Mbps

Coverage > 80m

802.11 2.4 GHz (Direct Sequence Spread Spectrum)


100 mW max output power

Data speed: 11.0 Mbps

Coverage > 80m

Connectivity Options

- Winsock 1.1 (subset)
- TCP/IP, SLIP, IRDA, IR SOCK
- LAN using NDIS
- UDP+
- WinINet
- UDP, FTP, HTTP

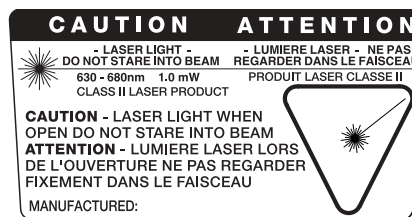**Hardware**

- Hitachi SH3, 80 MHz, 32-bit RISC processor
- 16 MB RAM
- 32 MB Flash
- PC-Card slot for radio, modem, or memory
- Compact flash card slot for memory expansion

Software

- Microsoft Windows CE operating system version 3.0*
- Internet Explorer 5.0 web browser with J-Script support
- Intrinsic HTTP Web Server
- Local and remote browser-based unit configuration and management utility

Interfaces

- DB9 Serial via Serial Link Adapter
- Optional RJ-45 serial connector (in place of integrated scanner)

Regulatory Approvals

UL Listed, UL 1950 and C22.2 No. 950, TÜV Rheinland GS, EN 60950 and EN 60825-1, FCC Part 15, Canada, RSS210 and ICES-003, Class B, EN 55022/CISPR 22, Class B, ETS 300 328, ETS 300 826, Compliant with all European directives, CE marked.

Accessories

Optional handle with trigger scan activation, Serial communications adapter, Charge dock with IRDA Communicator, Charge dock with serial communications, 4-pack battery charger, Holster, Users manual, Software Developers Kit (SDK)

* Intermec does not guarantee compatibility of software developed for dedicated Microsoft Windows CE devices such as Palm PC, Handheld PC and Handheld PC Pro. For best results, use the Intermec 5020 Software Developer Kit.

Intermec reserves the right to make changes without notice to any products herein for any reason at any time, including but not limited to improving the reliability, form, fit, function or design. Please contact Intermec for current price list and availability.

North America
Corporate Headquarters
6001 36th Avenue West
Everett, Washington 98203
tel: 425.348.2600
fax: 425.355.9551

Systems & Solutions
550 2nd Street S.E.
Cedar Rapids, Iowa 52401
tel: 319.369.3100
fax: 319.369.3453

Media Supplies
9290 Le Saint Drive
Fairfield, Ohio 45014
tel: 513.874.5882
fax: 513.874.8487

**Europe/
Middle East & Africa**
Headquarters
Sovereign House
Vestern Road
Reading, Berkshire RG1 8BT
United Kingdom
tel: +44.118.987.9400
fax: +44.118.987.9401

Asia
Hong Kong
2602 Convention Plaza
Office Tower
1 Harbor Road
Wanchai, Hong Kong
tel: 852.2574.9777
fax: 852.2574.9725

Singapore
25-16 International Plaza
10 Anson Road, 079903
tel: 65.324.8391
fax: 65.324.8393

Australia
Level 7, 200 Pacific Highway
Crows Nest NSW 2065
Australia
tel: 61.2.9492.4400
fax: 61.2.9954.6300

South America & Mexico
Latin America Headquarters
17921 B Skypark Circle
Irvine, California 92614
tel: 949.442.9393
fax: 949.757.1687

Mexico
Tamulipas 141, Primero Piso
06140 Mexico, D.F.
tel: 525.55.211.1919
fax: 525.55.211.8121

**Worldwide
Fax Document
Retrieval Service**
800.755.5505
(North America Only)
tel: 650.556.8447

Internet
www.intermec.com

Sales
800.347.2636
(toll free in N.A.)
tel: 425.348.2726

Service and Support
800.755.5505
(toll free in N.A.)
tel: 425.356.1799

Copyright © 2002 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 608738-01E 08/02

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.