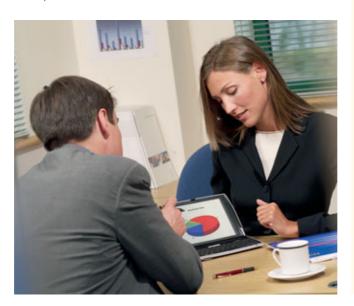# Smarter working on the move

IMPROVE PRODUCTIVITY AND CUSTOMER SATISFACTION THROUGH MOBILE CRM

Your mobile workforce needs a task-oriented computing device that is portable, yet powerful enough to run advanced mobile CRM applications. NETBOOK PRO combines the virtues of a larger laptop device, such as a large screen, full keyboard and multiple communications ports, with the virtues of smaller PDA-type devices, such as portability, instant on, long battery life and a touch screen. With the power to carry out work-related tasks anywhere NETBOOK PRO enables advanced mobile CRM applications across your enterprise workforce.

ADVANTAGES

- **Unparalleled Flexibilit**y – Unparalleled connectivity and expansion capabilities mean the NETBOOK PRO can be tailored to the unique needs of each customer. Data transfer and peripheral connectivity is achieved via the USB / RS-232 ActiveSync Cable and IrDA port. Expansion and/or connectivity is delivered via the Compact Flash, SDIO and PCMCIA Card Slots.

- **Ease of Integration** – Based on industry-standard Windows CE.NET and Intel XScale architecture, the NETBOOK PRO ensures seamless application development and integration into enterprise back-office systems. The advanced networking and security protocol support of Windows CE.NET make it the ideal operating system choice for mobile computing devices. Application development is simple through SDK tools and popular development environments such as Visual Studio.net and JEM-CE JAVA virtual machine.

- **Exceptional Ergonomics** – About half the size of a typical laptop, the NETBOOK PRO is both portable and lightweight yet delivers a full keyboard and a large, daylight-readable TFT SVGA 800 × 600 color touch display. Additional features such as instant on and long battery life combine to deliver a computing device that is ideal for mobile enterprise applications.

PSION TEKLOGIX

information in motion

NETBOOK® PRO Hand-Held Computer

Specifications

HARDWARE SUMMARY SPECIFICATION

- Processor: Intel XScale PXA255 400MHz

- Memory: 32MB Flash
  128MB SDRAM

- Display: SVGA (800x600) TFT transmissive display with CCFL backlight

- Controls: Resistive touch screen for pen navigation; 58-key touch-type keyboard

- Audio: AC97 Codec
  2.5mm stereo headphone/mic socket
  Speaker for alarms, buzzes and key clicks

- Comms: RS232 serial port Honda Connector
  IrDA 1.1
  Mini USB 1.1 master

- Expansion: CF card slot – type I & II
  PCMCIA card slot – type I & II
  SDIO/SD memory card/MMC card slot

- Power: DC Input
  Li-Ion battery pack (12.6V 2200mAH)
  2xAAA replaceable batteries for backup

PHYSICAL SUMMARY SPECIFICATION

- Maximum Overall Dimensions: 9.25 × 7.24 × 1.38 ins. / 235 × 184 × 35mm

- Weight: 2.4lb / 1100g

- Operating Temperature: 32°F to 122°F / 0°C to + 50°C

- Storage Temperature: 14°F to 140°F / -10°C to +60°C

- Humidity: 5 – 93% RH @ 104°F / +40°C non-condensing

- Temperature Shock: +/- 50°F / 10°C over 5 minutes

- Operating & Storage: All external fasteners non-ferrous plated

SOFTWARE SUMMARY SPECIFICATION

- Operating System: Microsoft Windows CE.NET 4.2

- ActiveSync Connectivity over:
  USB
  RS232
  IrDA
  Bluetooth

- Browser and Mail Access Connectivity Using Internet Browser Over:
  Serial modem (RS232 port, CF/PC card)
  802.11b radio (CF/PC card)
  GSM/GPRS radio (CF/PC card)
  Ethernet LAN (CF/PC NIC)
  CDMA 1xRTT (PC card)

- Applications:
  Internet Explorer 6.0
  Pocket On-Schedule*
  File Viewer
  MS Word Pad
  Windows Media Player
  ActiveSync
  Remote Desktop Connection
  Calculator
  Terminal Emulator / Hyper Terminal
  Windows Messenger
  JEM-CE Java Virtual Machine*
  SpreadCE*

  * denotes 3rd party applications

Specifications are subject to change without notification.